

HPT-SSL

SKID STEER LOADER TYRES

Skid Steer loader applications can vary but the HPT-SSL has been designed to perform in all of the most demanding conditions. With its high ply construction the robust carcass protects against punctures, and with its reinforced undertread and sidewall technology further protection is guaranteed against unwanted damage to both tyre and wheel. The HPT-SSL range has all the answers to match today's new generation of high performance skid steer machines keeping downtime to a minimum.



FEATURES AND BENEFITS

- High ply construction
- Extra wide profile lugs for maximum footprint
- Stepped tread design to assist self cleaning
- Extra thick sidewall with rim guard for tyre and wheel protection
- High tensile carcass
- Reinforced bead area

HPT-SSL HAS ALL THE ANSWERS

APPLICATIONS

- Forestry
- Construction
- Automotive
- Agricultural
- Landscaping
- General service



CERTIFICATE NO. Q/09672
BSEN ISO 9002




Industrial Tyres

Moving on Success

H P T S S L S P E C I F I C A T I O N S

TYRE SIZE	PLY RATING	WEIGHT (KGS)	RIM SIZE (INCHES)		INFLATED DIMENSIONS +2% (MM)		INFLATED PRESSURE BAR	LOAD CAPACITIES IN KG (SKID STEER LOADERS ONLY)	
			RECOMMENDED	ALTERNATIVE	SECTION WIDTH	OVERALL DIAMETER		8 KM/H	16 KM/H
23 x 8.50 - 12	8	12.7	7.001	7.00JA	210	576	4	1050	850
27 x 8.50 - 15	8	17	7.00JA	-	205	680	4	1230	1020
10 x 16.5	10	24.5	8.25	-	270	760	4.5	2020	1860
12 x 16.5	12	38.7	9.75	8.25	325	820	4.75	2660	2200

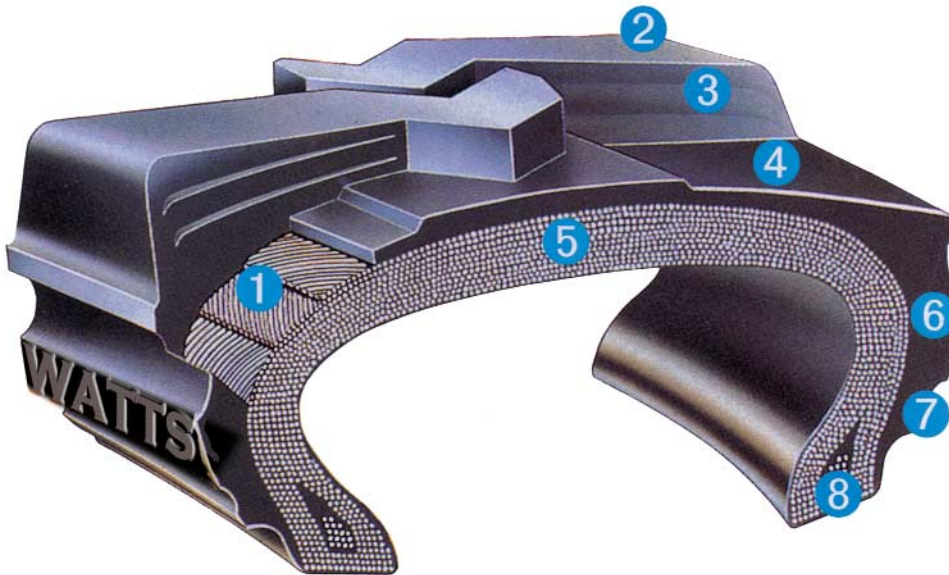

- 1. Extra Plies
- 2. Extra Wide Profile
- 3. Stepped Tread
- 4. Extra Thick Undertread
- 5. High Tensile Carcass
- 6. Extra Thick Sidewall
- 7. Rim Protection
- 8. Reinforced Bead Area

SKID STEER LOADERS



Watts

Industrial Tyres

Church Road, Lydney, Glos GL15 5EN, U.K.
Tel: +44 (0) 1594 847100 Fax: +44 (0) 1594 842429

E-mail industrial@watts-tyres.co.uk

www.industrialtyre.com

DISTRIBUTED BY: